



# CUBE B.SMART PRO8IGHT

## FEATURES

- STURDY STRUCTURE
- COMPACT DESIGN
- NATIVE WITH B.SMART CLOUD SOFTWARE
- INTEGRATED HOSE REEL
- INTEGRATED WATER CAPTOR FILTER
- IP55

CUBE B.SMART PROEIGHT dispenser is the new PIUSI product designed to meet the needs of the market. Thanks to the integration with the 8-meter 26-feet hose reel, CUBE B.Smart becomes even more compact, intuitive and easy to use. It is equipped with a self-priming vane pump with built-in bypass that delivers high performance refueling. The anti-vibration mounting ensures low noise and vibration, while the mechanical sealing and overheating protection of the motor enhances the product reliability and safety. The new CUBE B.SMART dispenser with hose reel is equipped with PIUSI WATER CAPTOR, a new filter designed to absorb particles of water that may be in the liquid.

### PERFORMANCE

UP TO <b>60 L/MIN</b>	<b>AC/DC</b> VOLTAGE
FLOW RATE	HOISE LENGTH
<b>30 µm</b>	<b>BLUETOOTH</b>
WATER CAPTOR FILTER	CONNECTION



CUBE B.SMART  
**Pro8ight**



### PACKAGING

CODE	WEIGHT		PACKAGING			N. BOXES / EUROPALLET	
	KG	LBS	MM	INCH	PCS/BOX	X	
FO0598800	57	125	1480X490X400	58,2X19X15	1	-	-



FILTRATION



TANK MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE



ANY BIODIESEL



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER



WINDSCREEN


## CHART

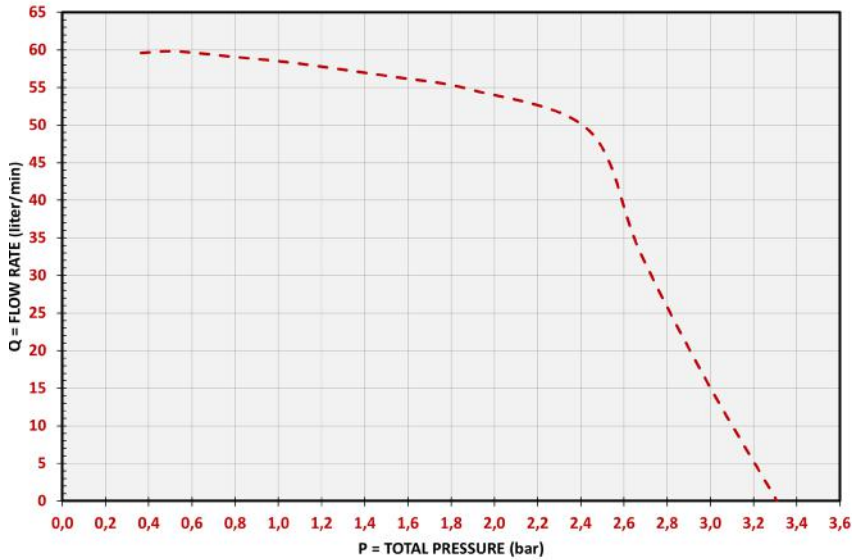

TYPE OF FLUID DIESEL

TEMPERATURE 20°C

## DIMENSIONS

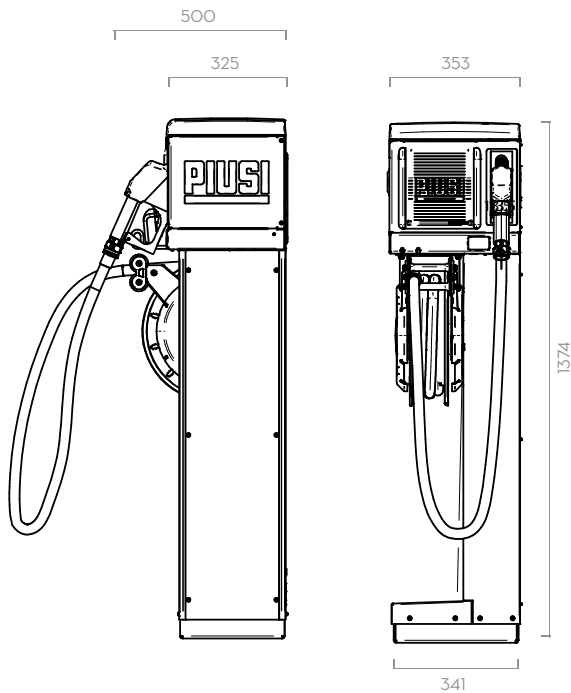

Dimensions expressed in millimeters

## IN THE BOX

- CUBE B.SMART PRO8IGHT DISPENSER
- AUTOMATIC NOZZLE
- DELIVERY HOSE
- DRIVER ACCESS ADD-ON
- INSTRUCTION MANUAL

## DETAILS



INTEGRATED HOSE REEL



B.SMART MOBILE APP



B.SMART CLOUD SOFTWARE



INTEGRATED WATER CAPTOR FILTER

## MATERIALS

- PUMPS: PANTHER AC
- METER: K600/3
- NOZZLE: AUTOMATIC NOZZLE

## TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE			PUMP	METER	NOZZLE	FILTER	INLET	HOSE		
			L/MIN	GPM	AC V./HZ	POWER WATT	AMP. MAX.						LENGTH	Ø	
FO0598800	CUBE 70 B.SMART 230V PRO8IGHT IO ACCESS	D	60	16	230V	50HZ	600	4.2A	PANTHER 72	K600/3	A60	YES	1"	8M	20MM